

QANN N to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~18GHz
VSWR:	1.15 max. 1.2 max. @flange mount
Insertion Loss:	0.45dB max.
Impedance:	50Ω

Mechanical

RF Connectors:	N
Outer Conductor:	Passivated stainless steel
Dielectric:	PTFE or PEI
Inner Conductor:	Gold plated brass or gold plated beryllium copper

Environmental


Temperature: -55~+85°C

How To Order

- QANN-MM** - N (m) to N (m), Outline A
- QANN-MF** - N (m) to N (f), Outline B
- QANN-FF** - N (f) to N (f), Outline C
- QANNR-MM** - N (m) to N (m), right angle, Outline D
- QANNR-MF** - N (m) to N (f), right angle, Outline E
- QANNR-FF** - N (f) to N (f), right angle, Outline F
- QANNH-FF** - N (f) to N (f), bulk head, Outline G
- QANNL-FF** - N (f) to N (f), flange mount, Outline H

Customization is available upon request.

Outline Drawings

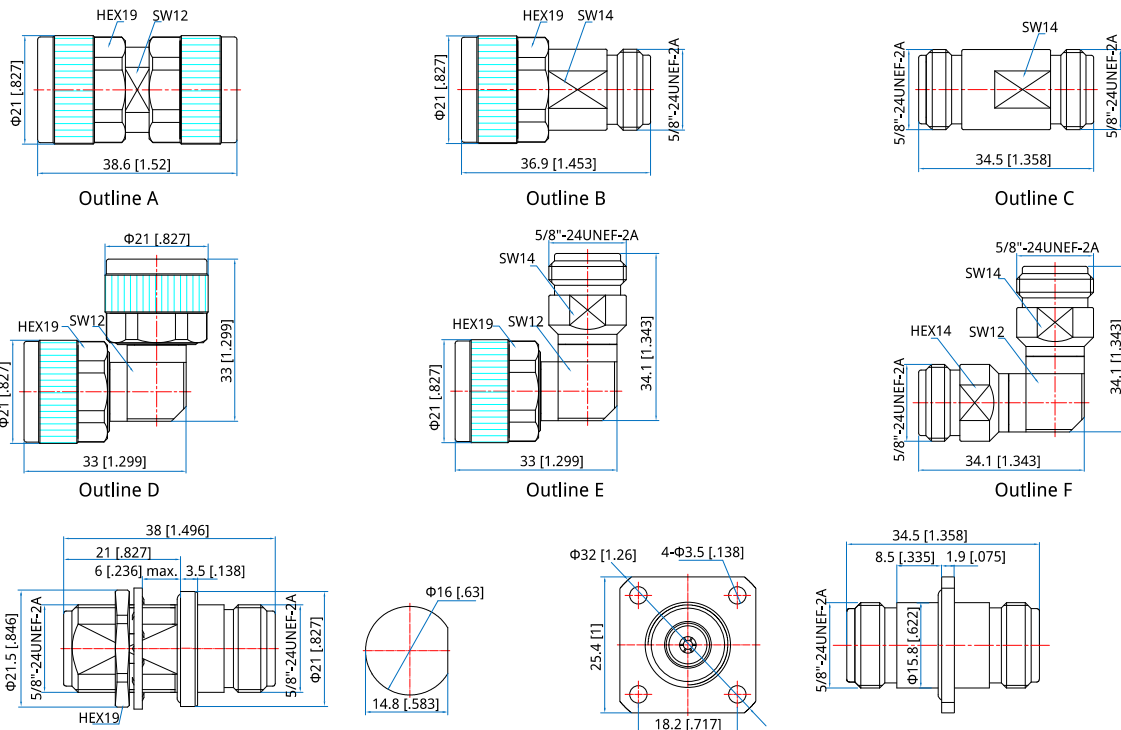

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]